



▲ I2C Addresses:
either pull up, pull
down, or GPIO
managed.

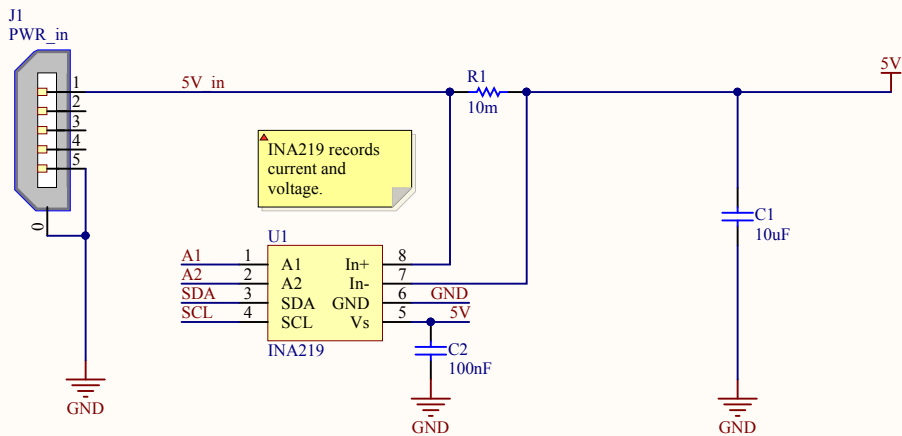

▲ Routing consideration:
if using 1oz/ft² copper layer,
external traces carrying 3A
current must be 54mil wide.

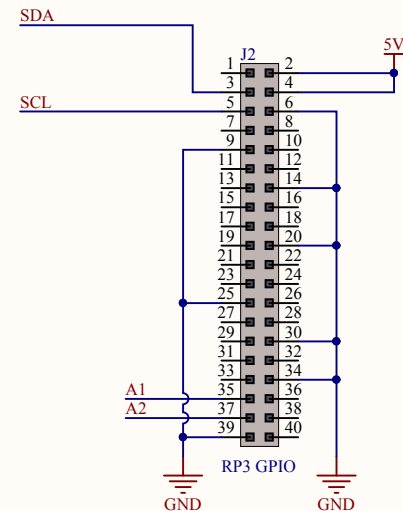

Title: Raspberry Pi 3 Daughter Card			
Contract:	Course: ECE599		
Contractor:	n/a	Engineer: JMS	Drawn By: JMS
Subcontractor:	The University of Tennessee, Knoxville, EECS Department	Sheet 1 of 1	Revision: B