

II. Spatial Systems

- A. Cellular Automata
- B. Pattern Formation
- C. Slime Mold
- D. Excitable Media

2015/1/13

1

A. Cellular Automata

2015/1/13

2

Cellular Automata (CAs)

- Invented by von Neumann in 1940s to study reproduction
- He succeeded in constructing a self-reproducing CA
- Have been used as:
 - massively parallel computer architecture
 - model of physical phenomena (Fredkin, Wolfram)
- Currently being investigated as model of quantum computation (QCs)

2015/1/13

3

Structure

- Discrete space (lattice) of regular *cells*
 - 1D, 2D, 3D, ...
 - rectangular, hexagonal, ...
- At each unit of time a cell changes state in response to:
 - its own previous state
 - states of neighbors (within some “radius”)
- All cells obey same state update rule
 - an FSA
- Synchronous updating

2015/1/13

4

Example: Conway’s Game of Life

- Invented by Conway in late 1960s
- A simple CA capable of universal computation
- Structure:
 - 2D space
 - rectangular lattice of cells
 - binary states (alive/dead)
 - neighborhood of 8 surrounding cells (& self)
 - simple population-oriented rule

2015/1/13

5

State Transition Rule

- Live cell has 2 or 3 live neighbors
 - stays as is (stasis)
- Live cell has < 2 live neighbors
 - dies (loneliness)
- Live cell has > 3 live neighbors
 - dies (overcrowding)
- Empty cell has 3 live neighbors
 - comes to life (birth)

2015/1/13

6


Demonstration of Life

[Run NetLogo Life](#)
 or
www.cs.utk.edu/~mclennan/Classes/420/NetLogo/Life.html

[Go to CBN](#)
[Online Experimentation Center](#)
mitpress.mit.edu/books/FLAOH/cbnhtml/java.html

2015/1/13 7


Breeder using Golly

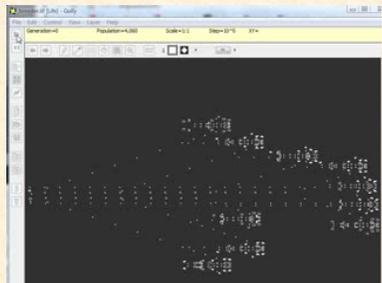

2015/1/13 8


<http://golly.sourceforge.net/>
 (videos: <https://www.youtube.com/playlist?list=PLu9PMO0QsVzSbY8zh0YLKnT4al.MY4rTh>)

Banner

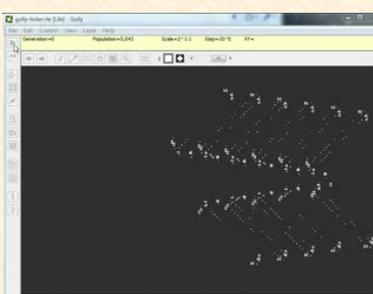

2015/1/13 9

Life Simulating Life

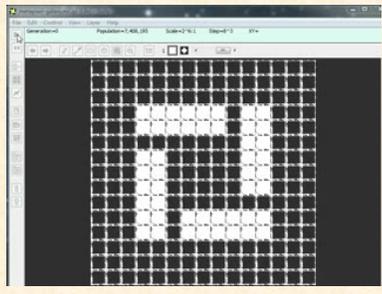

2015/1/13 10

Some Observations About Life


1. Long, chaotic-looking initial transient
 - unless initial density too low or high
2. Intermediate phase
 - isolated islands of complex behavior
 - matrix of static structures & "blinkers"
 - gliders creating long-range interactions
3. Cyclic attractor
 - typically short period

2015/1/13 11

From Life to CAs in General

- What gives Life this very rich behavior?
- Is there some simple, general way of characterizing CAs with rich behavior?
- It belongs to Wolfram's Class IV

2015/1/13 12

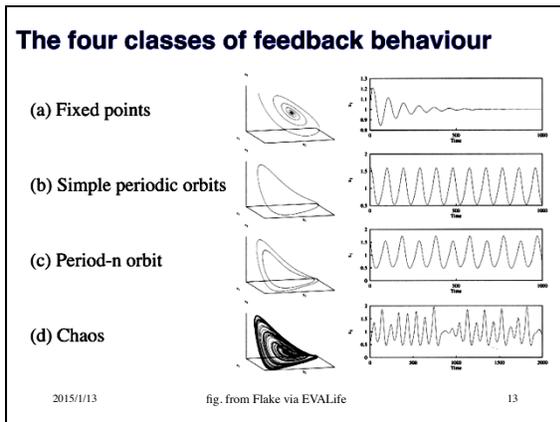

- ### Wolfram's Classification
- Class I: evolve to fixed, homogeneous state
~ limit point
 - Class II: evolve to simple separated periodic structures
~ limit cycle
 - Class III: yield chaotic aperiodic patterns
~ strange attractor (chaotic behavior)
 - Class IV: complex patterns of localized structure
~ long transients, no analog in dynamical systems
- 2015/1/13 14

Langton's Investigation

Under what conditions can we expect a complex dynamics of information to emerge spontaneously and come to dominate the behavior of a CA?

2015/1/13 15

- ### Approach
- Investigate 1D CAs with:
 - random transition rules
 - starting in random initial states
 - Systematically vary a simple parameter characterizing the rule
 - Evaluate qualitative behavior (Wolfram class)
- 2015/1/13 16

- ### Why a Random Initial State?
- How can we characterize typical behavior of CA?
 - Special initial conditions may lead to special (atypical) behavior
 - Random initial condition effectively runs CA in parallel on a sample of initial states
 - Addresses emergence of order from randomness
- 2015/1/13 17

- ### Assumptions
- Periodic boundary conditions
 - no special place
 - Strong quiescence:
 - if all the states in the neighborhood are the same, then the new state will be the same
 - persistence of uniformity
 - Spatial isotropy:
 - all rotations of neighborhood state result in same new state
 - no special direction
 - Totalistic [not used by Langton]:
 - depend only on sum of states in neighborhood
 - implies spatial isotropy
- 2015/1/13 18

Langton's Lambda

- Designate one state to be quiescent state
- Let K = number of states
- Let $N = 2r + 1$ = size of neighborhood
- Let $T = K^N$ = number of entries in table
- Let n_q = number mapping to quiescent state
- Then

$$\lambda = \frac{T - n_q}{T}$$

2015/1/13

19

Range of Lambda Parameter

- If *all* configurations map to quiescent state:
 $\lambda = 0$
- If *no* configurations map to quiescent state:
 $\lambda = 1$
 - If every state is represented *equally*:
 $\lambda = 1 - 1/K$
 - A sort of measure of “excitability”

2015/1/13

20

Example

- States: $K = 5$
- Radius: $r = 1$
- Initial state: random
- Transition function: random (given λ)

2015/1/13

21

Project 1

- Investigation of relation between Wolfram classes, Langton's λ , and entropy in 1D CAs
- **Due Feb. 4**
- Information is on course website (scroll down to “Projects/Assignments”)
- Read it over and email questions or ask in class

2015/1/13

22

Demonstration of 1D Totalistic CA

[Run NetLogo 1D CA General Totalistic](#)

OR

www.cs.utk.edu/~mclennan/Classes/420/NetLogo/CA-1D-General-Totalistic.html

[Go to CBN](#)

[Online Experimentation Center](#)

mitpress.mit.edu/books/FLA08/cbnhtml/java.html

2015/1/13







23

Class I ($\lambda = 0.2$)




2015/1/13

24

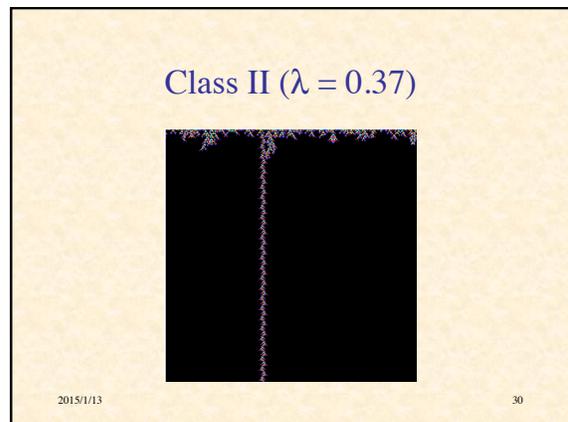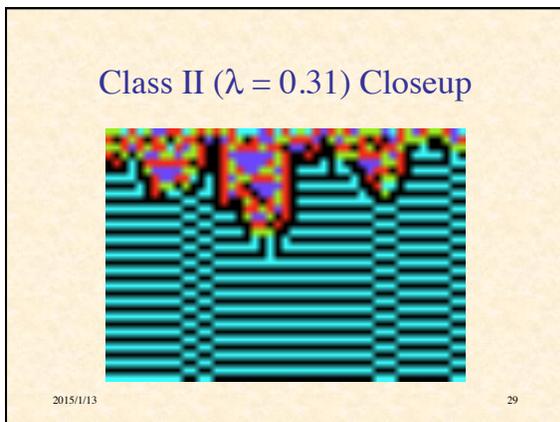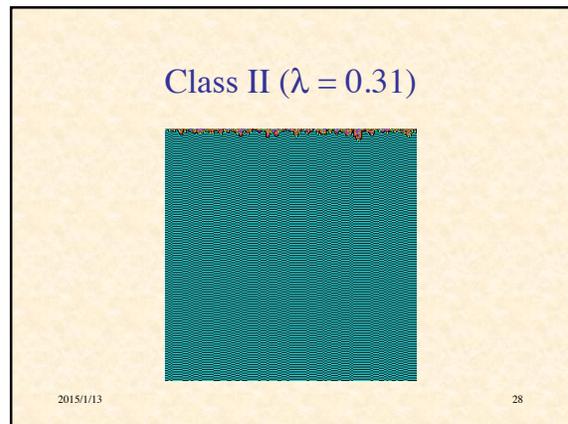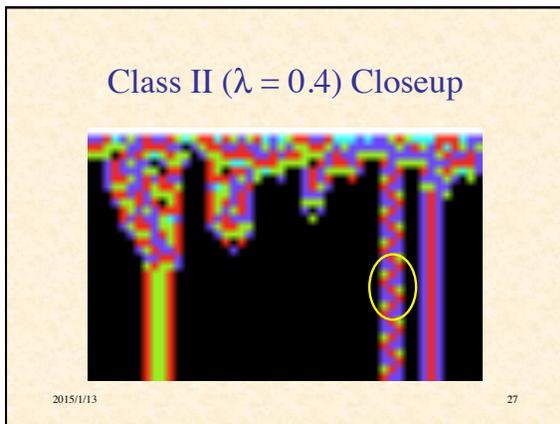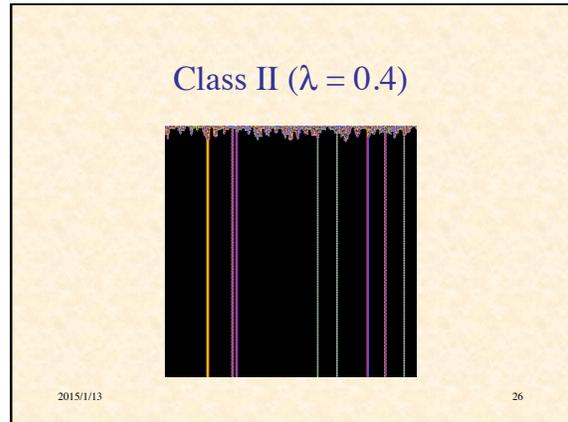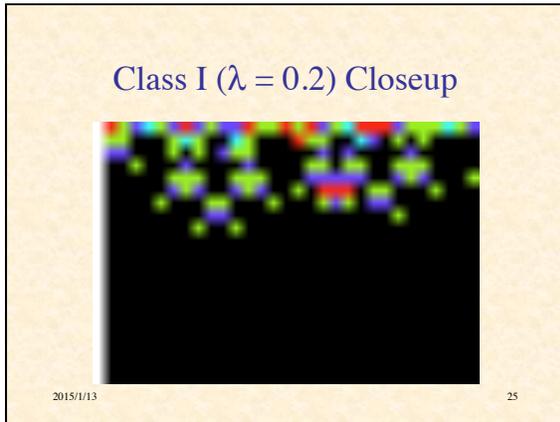


Class II ($\lambda = 0.37$) Closeup



2015/1/13 31

This slide shows a closeup of a Class II cellular automaton pattern. The pattern consists of a single vertical line of periodic structure, with a repeating sequence of colors (red, blue, green, yellow) against a black background.


Class III ($\lambda = 0.5$)



2015/1/13 32

This slide shows a Class III cellular automaton pattern, which is a random, noisy distribution of colors (red, blue, green, yellow) against a black background.


Class III ($\lambda = 0.5$) Closeup

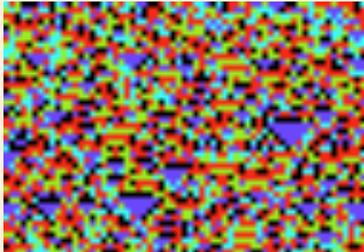

2015/1/13 33

This slide shows a closeup of a Class III cellular automaton pattern, which is a random, noisy distribution of colors (red, blue, green, yellow) against a black background.


Class IV ($\lambda = 0.35$)



2015/1/13 34

This slide shows a Class IV cellular automaton pattern, which is a complex, fractal-like structure with a repeating pattern of colors (red, blue, green, yellow) against a black background.


Class IV ($\lambda = 0.35$) Closeup



2015/1/13 35





This slide shows a closeup of a Class IV cellular automaton pattern, which is a complex, fractal-like structure with a repeating pattern of colors (red, blue, green, yellow) against a black background.

Class IV ($\lambda = 0.34$)



2015/1/13 36

This slide shows a Class IV cellular automaton pattern, which is a complex, fractal-like structure with a repeating pattern of colors (green, blue, yellow) against a black background.

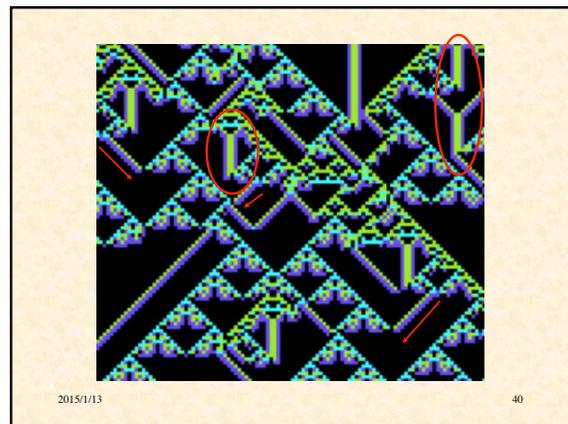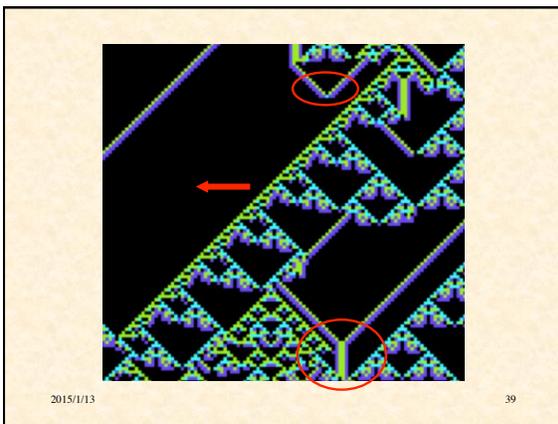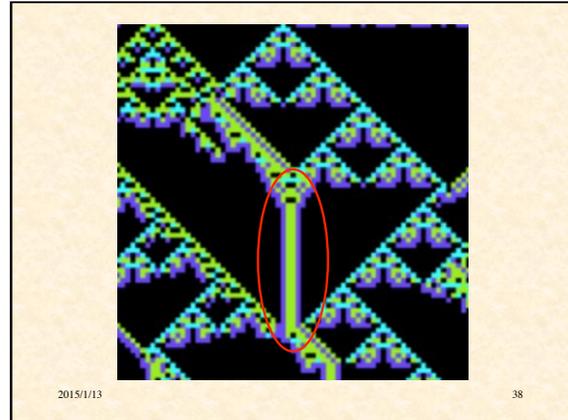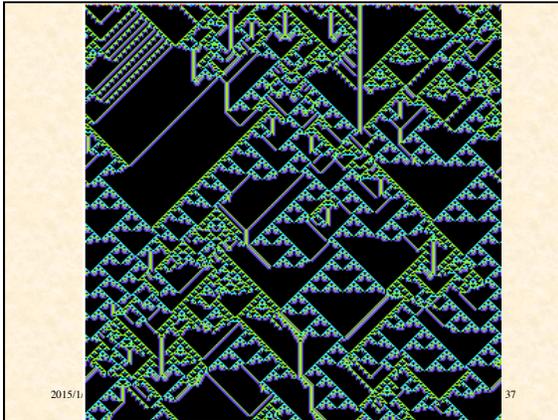

Class IV Shows Some of the Characteristics of Computation

- Persistent, but not perpetual storage
- Terminating cyclic activity
- Nonlocal transfer of control and information

2015/1/13 41

A Computational Medium

- Storage of Information
- Transfer of Information
- Modification of Information

2015/1/13 42

Class IV and Biology

- We expect biological material to exhibit Class IV behavior
- Stable
- But not too rigid
- Global coordination
- Solids, liquids, and “soft matter”

2015/1/13 43

λ of Life

- For Life, $\lambda \approx 0.273$
- which is near the critical region for CAs with:
 - $K = 2$
 - $N = 9$

2015/1/13 44

Transient Length (I, II)

2015/1/13 45

Transient Length (III)

2015/1/13 46

Shannon Information (very briefly!)

- Information varies directly with surprise
- Information varies inversely with probability
- Information is additive
- \therefore The information content of a message is proportional to the negative log of its probability

$$I\{s\} = -\lg \Pr\{s\}$$

2015/1/13 47

Entropy

- Suppose have source S of symbols from ensemble $\{s_1, s_2, \dots, s_N\}$
- Average information per symbol:

$$\sum_{k=1}^N \Pr\{s_k\} I\{s_k\} = \sum_{k=1}^N \Pr\{s_k\} (-\lg \Pr\{s_k\})$$
- This is the *entropy* of the source:

$$H\{S\} = -\sum_{k=1}^N \Pr\{s_k\} \lg \Pr\{s_k\}$$

2015/1/13 48

Maximum and Minimum Entropy

- Maximum entropy is achieved when all signals are equally likely
No ability to guess; maximum surprise
 $H_{\max} = \lg N$
- Minimum entropy occurs when one symbol is certain and the others are impossible
No uncertainty; no surprise
 $H_{\min} = 0$

2015/1/13 49

Entropy Examples

2015/1/13 50

Entropy of Transition Rules


- Among other things, a way to measure the uniformity of a distribution
$$H = -\sum_i p_i \lg p_i$$
- Distinction of quiescent state is arbitrary
- Let n_k = number mapping into state k
- Then $p_k = n_k / T$
$$H = \lg T - \frac{1}{T} \sum_{k=1}^K n_k \lg n_k$$

2015/1/13 51

Entropy Range

- Maximum entropy ($\lambda = 1 - 1/K$):
uniform as possible
all $n_k = T/K$
 $H_{\max} = \lg K$
- Minimum entropy ($\lambda = 0$ or $\lambda = 1$):
non-uniform as possible
one $n_s = T$
all other $n_r = 0$ ($r \neq s$)
 $H_{\min} = 0$







2015/1/13 52

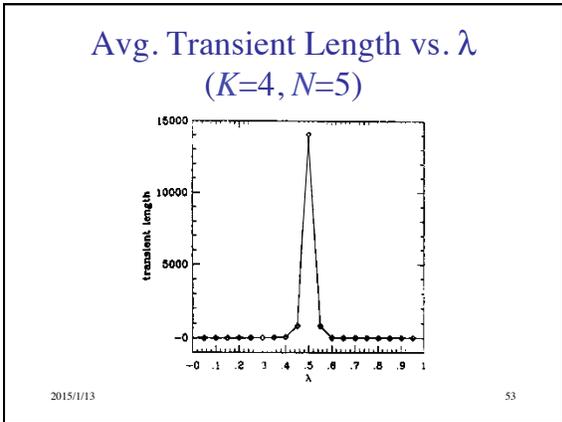

Further Investigations by Langton

- 2-D CAs
- $K = 8$
- $N = 5$
- 64×64 lattice
- periodic boundary conditions

2015/1/13 54

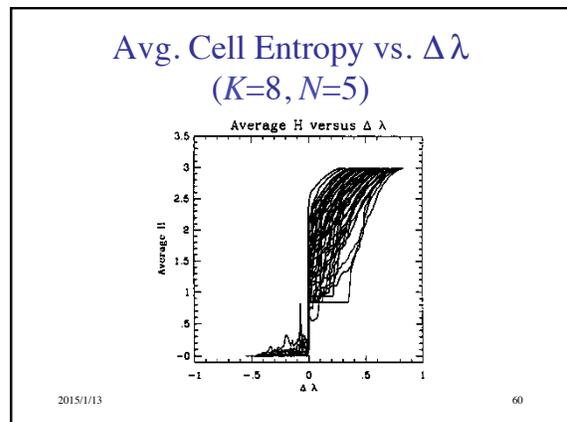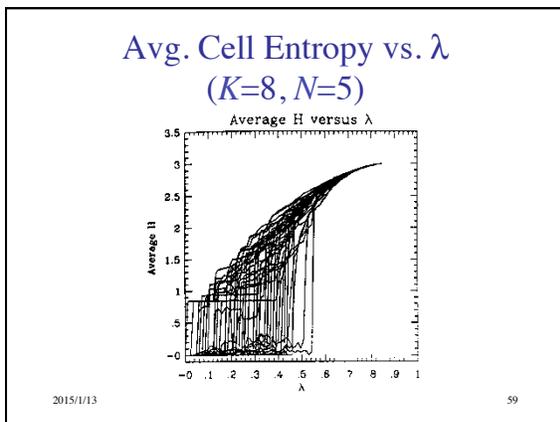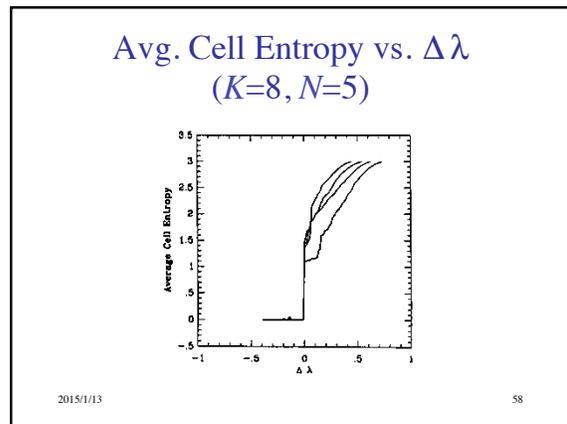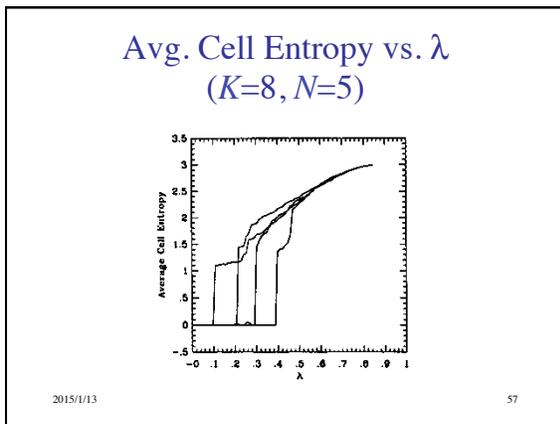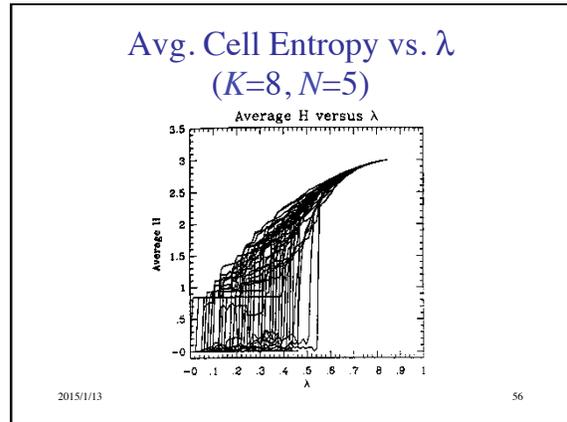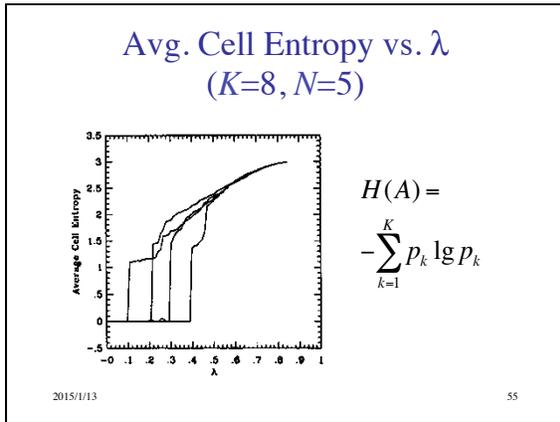

Entropy of Independent Systems

- Suppose sources A and B are independent
- Let $p_j = \Pr\{a_j\}$ and $q_k = \Pr\{b_k\}$
- Then $\Pr\{a_j, b_k\} = \Pr\{a_j\} \Pr\{b_k\} = p_j q_k$

$$H(A,B) = -\sum_{j,k} \Pr(a_j, b_k) \lg \Pr(a_j, b_k)$$

$$= -\sum_{j,k} p_j q_k \lg(p_j q_k) = -\sum_{j,k} p_j q_k (\lg p_j + \lg q_k)$$

$$= -\sum_j p_j \lg p_j - \sum_k q_k \lg q_k = H(A) + H(B)$$

2015/1/13 61




Mutual Information

- *Mutual information* measures the degree to which two sources are not independent
- A measure of their correlation

$$I(A,B) = H(A) + H(B) - H(A,B)$$

- $I(A,B) = 0$ for completely independent sources
- $I(A,B) = H(A) = H(B)$ for completely correlated sources

2015/1/13 62

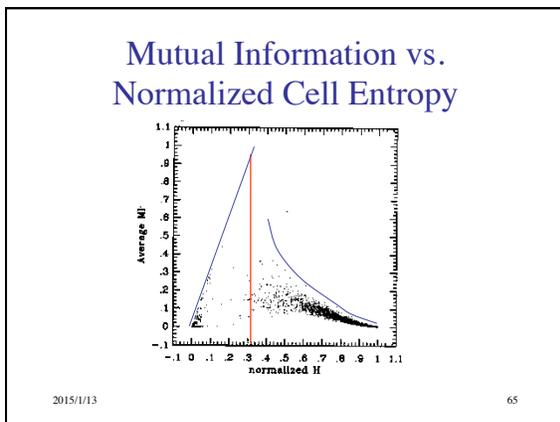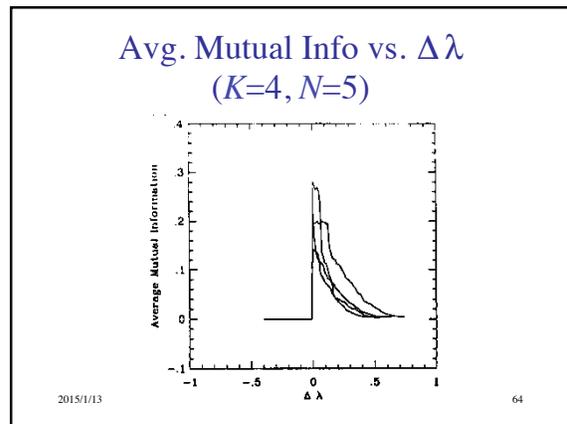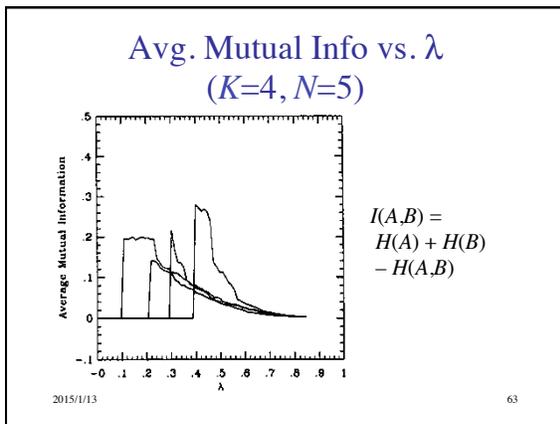

Critical Entropy Range



- Information *storage* involves *lowering* entropy
- Information *transmission* involves *raising* entropy
- Information *processing* requires a tradeoff between low and high entropy

2015/1/13 66

Suitable Media for Computation

- How can we identify/synthesize novel computational media?
 - especially nanostructured materials for massively parallel computation
- Seek materials/systems exhibiting Class IV behavior
 - may be identifiable via entropy, mut. info., etc.
- Find physical properties (such as λ) that can be controlled to put into Class IV

2015/1/13 67

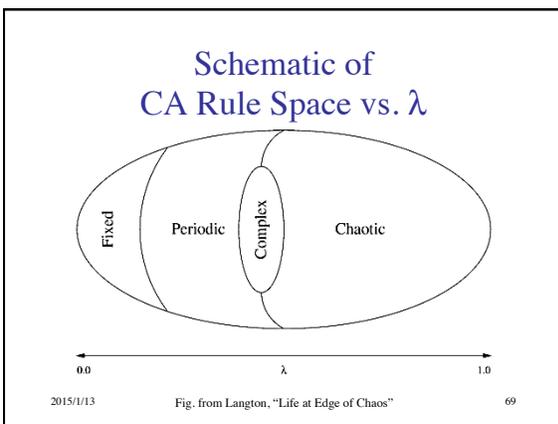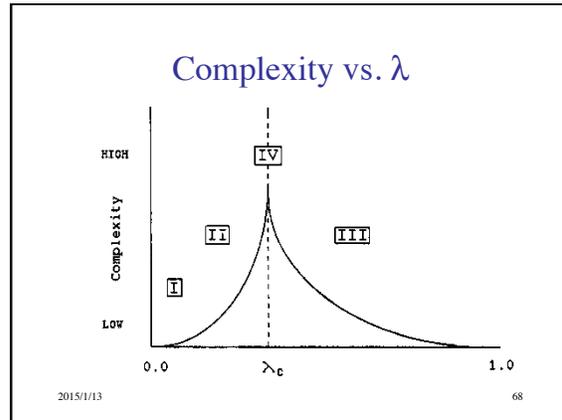

Some of the Work in this Area

- Wolfram: *A New Kind of Science*
 - www.wolframscience.com/nksonline/toc.html
- Langton: Computation/life at the edge of chaos
- Crutchfield: Computational mechanics
- Mitchell: Evolving CAs
- and many others...

2015/1/13 70

Some Other Simple Computational Systems Exhibiting the Same Behavioral Classes

<ul style="list-style-type: none"> • CAs (1D, 2D, 3D, totalistic, etc.) • Mobile Automata • Turing Machines • Substitution Systems • Tag Systems • Cyclic Tag Systems 	<ul style="list-style-type: none"> • Symbolic Systems (combinatory logic, lambda calculus) • Continuous CAs (coupled map lattices) • PDEs • Probabilistic CAs • Multiway Systems
---	---

2015/1/13 71

Universality

- A system is *computationally universal* if it can compute anything a Turing machine (or digital computer) can compute
- The Game of Life is universal
- Several 1D CAs have been proved to be universal
- Are all complex (Class IV) systems universal?
- Is universality rare or common?

2015/1/13 72

Rule 110: A Universal 1D CA

- $K = 2, N = 3$
- New state = $\neg(p \wedge q \wedge r) \wedge (q \vee r)$
where p, q, r are neighborhood states
- Proved by Wolfram

2015/1/13 73

Fundamental Universality Classes of Dynamical Behavior

2015/1/13 74

Wolfram's Principle of Computational Equivalence

- "a fundamental unity exists across a vast range of processes in nature and elsewhere: despite all their detailed differences every process can be viewed as corresponding to a computation that is ultimately equivalent in its sophistication" (NKS 719)
- Conjecture: "among all possible systems with behavior that is not obviously simple an overwhelming fraction are universal" (NKS 721)

2015/1/13 75

Computational Irreducibility

- "systems one uses to make predictions cannot be expected to do computations that are any more sophisticated than the computations that occur in all sorts of systems whose behavior we might try to predict" (NKS 741)
- "even if in principle one has all the information one needs to work out how some particular system will behave, it can still take an irreducible amount of computational work to do this" (NKS 739)
- That is: for Class IV systems, you can't (in general) do better than simulation.

2015/1/13 76

Additional Bibliography

1. Langton, Christopher G. "Computation at the Edge of Chaos: Phase Transitions and Emergent Computation," in *Emergent Computation*, ed. Stephanie Forrest. North-Holland, 1990.
2. Langton, Christopher G. "Life at the Edge of Chaos," in *Artificial Life II*, ed. Langton et al. Addison-Wesley, 1992.
3. Emmeche, Claus. *The Garden in the Machine: The Emerging Science of Artificial Life*. Princeton, 1994.
4. Wolfram, Stephen. *A New Kind of Science*. Wolfram Media, 2002.

2015/1/13 77

Part 2B