

V. Evolutionary Computing

A. Genetic Algorithms

2012/3/26

1

Genetic Algorithms

- Developed by John Holland in '60s
- Did not become popular until late '80s
- A simplified model of genetics and evolution by natural selection
- Most widely applied to optimization problems (maximize “fitness”)

2012/3/26

2

Assumptions

- Existence of fitness function to quantify merit of potential solutions
 - this “fitness” is what the GA will maximize
- A mapping from bit-strings to potential solutions
 - best if each possible string generates a legal potential solution
 - choice of mapping is important
 - can use strings over other finite alphabets

2012/3/26

3

Outline of Simplified GA

1. Random initial population $P(0)$
2. Repeat for $t = 0, \dots, t_{\max}$ or until converges:
 - a) create empty population $P(t + 1)$
 - b) repeat until $P(t + 1)$ is full:
 - 1) select two individuals from $P(t)$ based on fitness
 - 2) optionally mate & replace with offspring
 - 3) optionally mutate offspring
 - 4) add two individuals to $P(t + 1)$

2012/3/26

4

Fitness-Biased Selection


- Want the more “fit” to be more likely to reproduce
 - always selecting the best
⇒ premature convergence
 - probabilistic selection ⇒ better exploration
- Roulette-wheel selection: probability \propto relative fitness:

$$\Pr\{i \text{ mates}\} = \frac{f_i}{\sum_{j=1}^n f_j}$$

2012/3/26

5

Crossover: Biological Inspiration


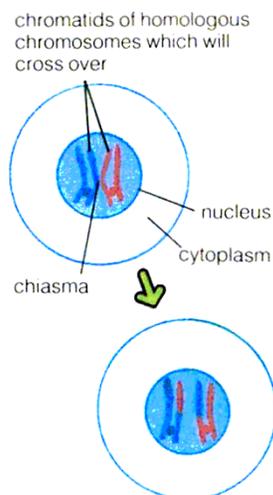


- Occurs during meiosis, when haploid gametes are formed
- Randomly mixes genes from two parents
- Creates genetic variation in gametes


2012/3/26

(fig. from *B&N Thes. Biol.*)

6

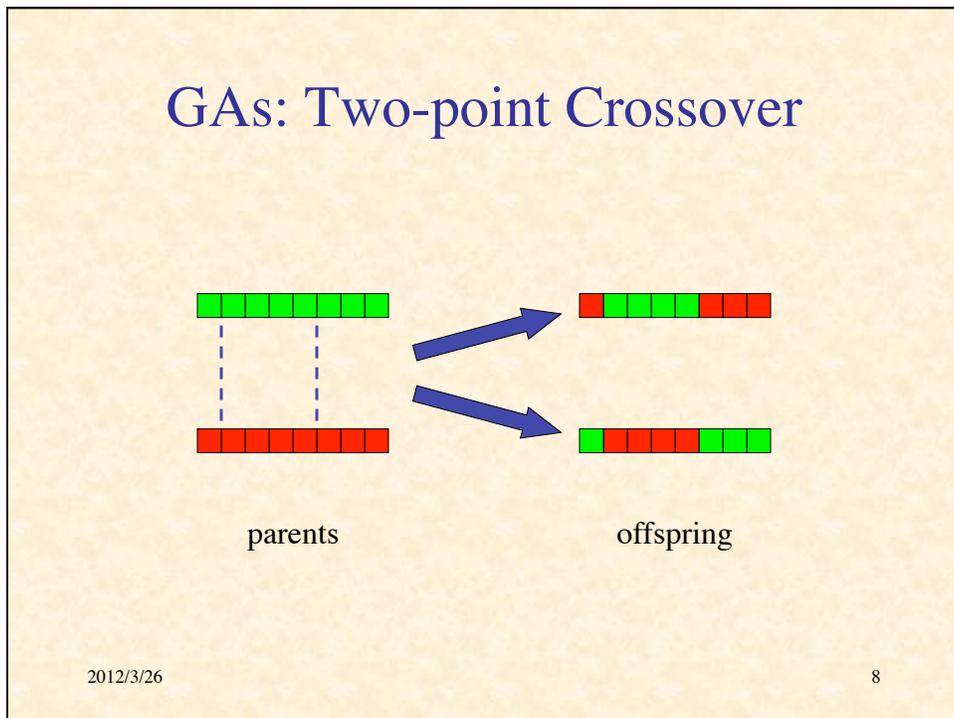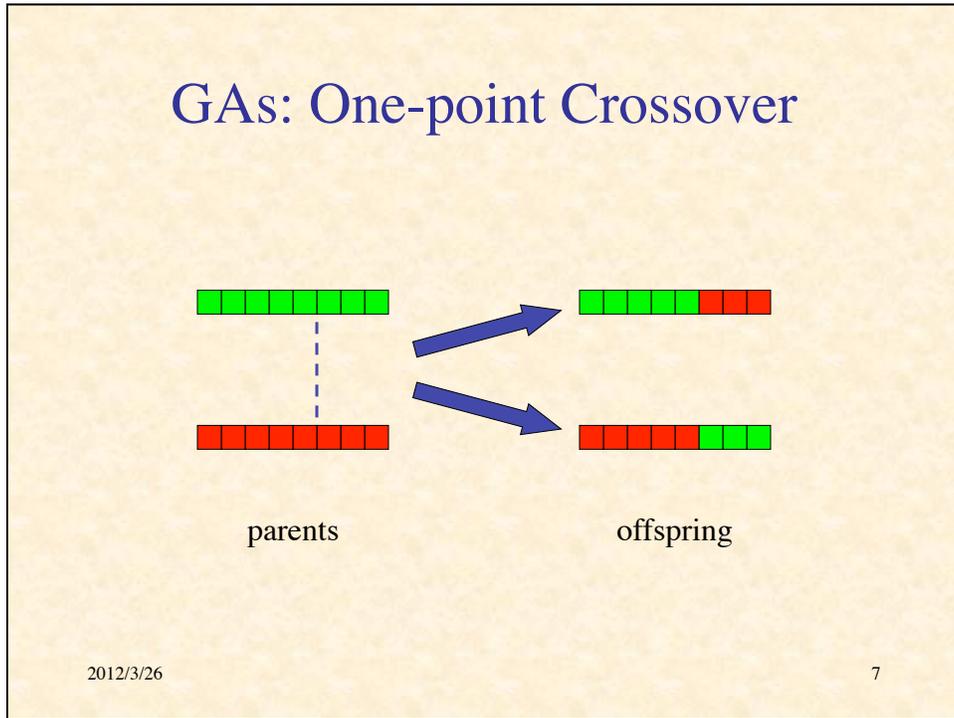

GAs: N -point Crossover

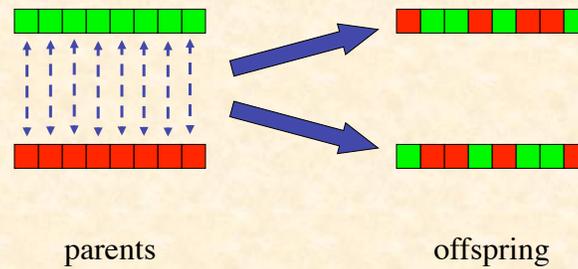


2012/3/26

9

Mutation: Biological Inspiration

- **Chromosome mutation** \Rightarrow
- **Gene mutation:** alteration of the DNA in a gene
 - inspiration for mutation in GAs
- In typical GA each bit has a low probability of changing
- Some GAs models rearrange bits

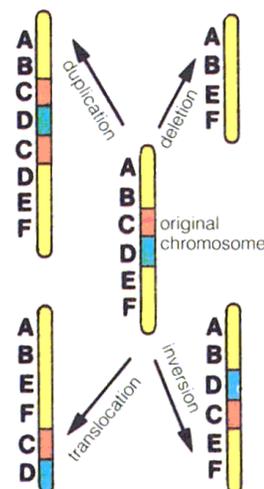


2012/3/26

(fig. from *B&N Thes. Biol.*)

10

The Red Queen Hypothesis

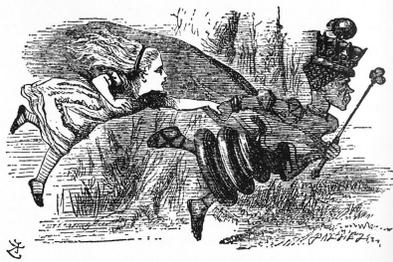

“Now, *here*, you see, it takes all the running *you* can do, to keep in the same place.”
— *Through the Looking-Glass and What Alice Found There*

- *Observation*: a species probability of extinction is independent of time it has existed
- *Hypothesis*: species continually adapt to each other
- Extinction occurs with insufficient variability for further adaptation

2012/3/26

11

Demonstration of GA: Finding Maximum of Fitness Landscape

[Run Genetic Algorithms — An Intuitive Introduction](#)
by Pascal Glauser

<www.glauserweb.ch/gentore.htm>

2012/3/26

12

Demonstration of GA: Evolving to Generate a Pre-specified Shape (Phenotype)

[Run Genetic Algorithm Viewer](http://www.rennard.org/alife/english/gavgb.html)
<www.rennard.org/alife/english/gavgb.html>

2012/3/26

13

Demonstration of GA: Eaters Seeking Food

<http://math.hws.edu/xJava/GA/>

2012/3/26

14

Morphology Project by Michael “Flux” Chang

- Senior Independent Study project at UCLA
 - users.design.ucla.edu/~mflux/morphology
- Researched and programmed in 10 weeks
- Programmed in **Processing** language
 - www.processing.org

2012/3/26

15

Genotype \Rightarrow Phenotype

- Cells are “grown,” not specified individually
- Each gene specifies information such as:
 - angle
 - distance
 - type of cell
 - how many times to replicate
 - following gene
- Cells connected by “springs”
- Run **phenome**:
users.design.ucla.edu/~mflux/morphology/gallery/sketches/phenome

2012/3/26

16

Complete Creature

- Neural nets for control (blue)
 - integrate-and-fire neurons
- Muscles (red)
 - decrease “spring length” when fire
- Sensors (green)
 - fire when exposed to “light”
- Structural elements (grey)
 - anchor other cells together
- Creature embedded in a fluid
- Run users.design.ucla.edu/~mflux/morphology/gallery/sketches/creature

2012/3/26

17

Effects of Mutation


- Neural nets for control (blue)
- Muscles (red)
- Sensors (green)
- Structural elements (grey)
- Creature embedded in a fluid
- Run users.design.ucla.edu/~mflux/morphology/gallery/sketches/creaturepack

2012/3/26

18

- Population: 150–200
- Nonviable & nonresponsive creatures eliminated
- Fitness based on speed or light-following
- 30% of new pop. are mutated copies of best
- 70% are random
- No crossover


Evolution

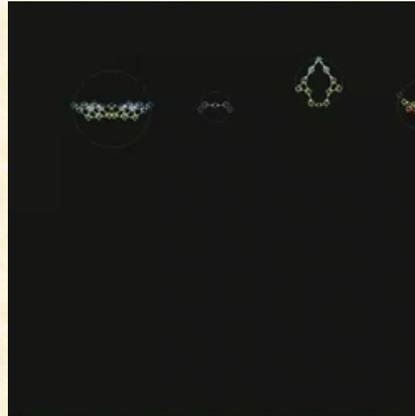

2012/3/26

19

Gallery of Evolved Creatures

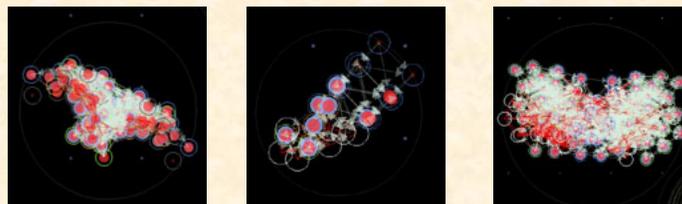

- Selected for speed of movement
- Run

users.design.ucla.edu/~mflux/morphology/gallery/sketches/creaturegallery

2012/3/26

20

Why Does the GA Work?


The Schema Theorem

2012/3/26

21

Schemata

A **schema** is a description of certain patterns of bits in a genetic string

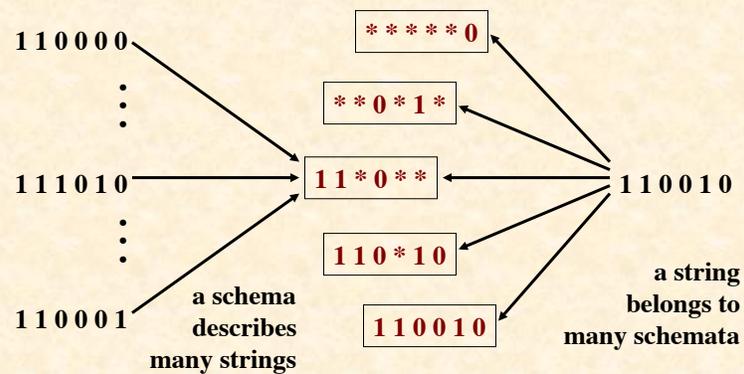

2012/3/26

22

The Fitness of Schemata

- The schemata are the **building blocks** of solutions
- We would like to know the average fitness of all possible strings belonging to a schema
- We cannot, but the strings in a population that belong to a schema give an estimate of the fitness of that schema
- Each string in a population is giving information about all the schemata to which it belongs (**implicit parallelism**)

2012/3/26

23

Effect of Selection

Let n = size of population

Let $m(S, t)$ = number of instances of schema S at time t

String i gets picked with probability $\frac{f_i}{\sum_j f_j}$

Let $f(S)$ = avg fitness of instances of S at time t

So expected $m(S, t + 1) = m(S, t) \cdot n \cdot \frac{f(S)}{\sum_j f_j}$

Since $f_{av} = \frac{\sum_j f_j}{n}$, $m(S, t + 1) = m(S, t) \frac{f(S)}{f_{av}}$

2012/3/26

24

Exponential Growth

- We have discovered:

$$m(S, t+1) = m(S, t) \cdot f(S) / f_{av}$$
- Suppose $f(S) = f_{av} (1 + c)$
- Then $m(S, t) = m(S, 0) (1 + c)^t$
- That is, **exponential growth** in above-average schemata

2012/3/26

25

Effect of Crossover

1 ... 0

$$|\leftarrow \delta \rightarrow|$$

- Let λ = length of genetic strings
- Let $\delta(S)$ = defining length of schema S
- Probability {crossover destroys S }:

$$p_d \leq \delta(S) / (\lambda - 1)$$
- Let p_c = probability of crossover
- Probability schema survives:

$$p_s \geq 1 - p_c \frac{\delta(S)}{\lambda - 1}$$

2012/3/26

26

Selection & Crossover Together

$$m(S, t + 1) \geq m(S, t) \frac{f(S)}{f_{\text{av}}} \left[1 - p_c \frac{\delta(S)}{\lambda - 1} \right]$$

2012/3/26

27

Effect of Mutation

- Let p_m = probability of mutation
- So $1 - p_m$ = probability an allele survives
- Let $o(S)$ = number of fixed positions in S
- The probability they all survive is
 $(1 - p_m)^{o(S)}$
- If $p_m \ll 1$, $(1 - p_m)^{o(S)} \approx 1 - o(S) p_m$

2012/3/26

28

Schema Theorem: “Fundamental Theorem of GAs”

$$m(S, t + 1) \geq m(S, t) \frac{f(S)}{f_{av}} \left[1 - p_c \frac{\delta(S)}{\lambda - 1} - o(S) p_m \right]$$

2012/3/26

29

The Bandit Problem

- Two-armed bandit:
 - random payoffs with (unknown) means m_1, m_2 and variances σ_1, σ_2
 - optimal strategy: allocate exponentially greater number of trials to apparently better lever
- k -armed bandit: similar analysis applies
- Analogous to allocation of population to schemata
- Suggests GA may allocate trials optimally

2012/3/26

30

Goldberg's Analysis of Competent & Efficient GAs

2012/3/26

31

Paradox of GAs

- Individually uninteresting operators:
 - selection, recombination, mutation
- Selection + mutation \Rightarrow continual improvement
- Selection + recombination \Rightarrow innovation
 - fundamental to invention:
generation vs. evaluation
- Fundamental intuition of GAs: the three work well together

2012/3/26

32

Race Between Selection & Innovation: Takeover Time

- Takeover time t^* = average time for most fit to take over population
- Transaction selection: population replaced by s copies of top $1/s$
- s quantifies selective pressure
- Estimate $t^* \approx \ln n / \ln s$

2012/3/26

33

Innovation Time

- Innovation time t_i = average time to get a better individual through crossover & mutation
- Let p_i = probability a single crossover produces a better individual
- Number of individuals undergoing crossover = $p_c n$
- Number of probable improvements = $p_i p_c n$
- Estimate: $t_i \approx 1 / (p_c p_i n)$

2012/3/26

34

Steady State Innovation


- Bad: $t^* < t_i$
 - because once you have takeover, crossover does no good
- Good: $t_i < t^*$
 - because each time a better individual is produced, the t^* clock resets
 - *steady state innovation*
- Innovation number:

$$Iv = \frac{t^*}{t_i} = p_c p_i \frac{n \ln n}{\ln s} > 1$$

2012/3/26

35

Feasible Region

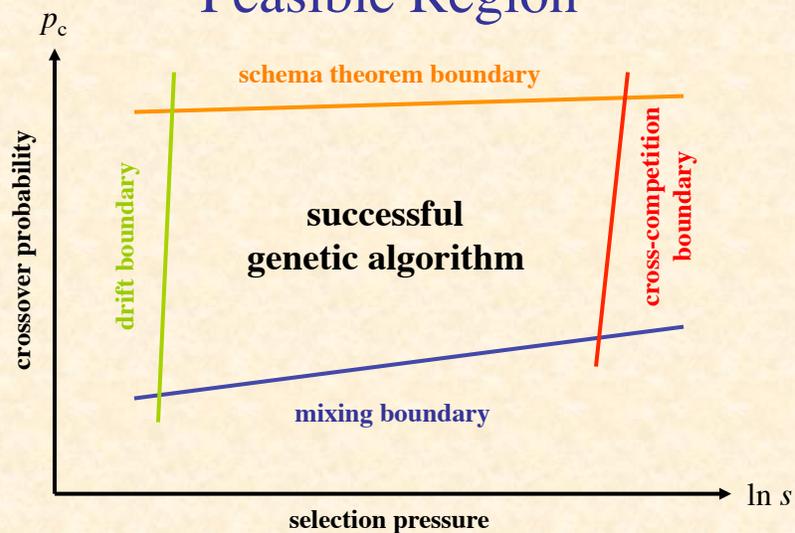

2012/3/26

36

Other Algorithms Inspired by Genetics and Evolution

- Evolutionary Programming
 - natural representation, no crossover, time-varying continuous mutation
- Evolutionary Strategies
 - similar, but with a kind of recombination
- Genetic Programming
 - like GA, but program trees instead of strings
- Classifier Systems
 - GA + rules + bids/payments
- and many variants & combinations...

2012/3/26

37

Next: Agents and Self-Organization

(Re)read ch. 16

2012/3/26

38

Additional Bibliography

1. Goldberg, D.E. *The Design of Innovation: Lessons from and for Competent Genetic Algorithms*. Kluwer, 2002.
2. Milner, R. *The Encyclopedia of Evolution*. Facts on File, 1990.

